

Quickstart Manual



Introduction

1.0

Welcome to the TToby Quickstart Guide. This shortened guide is supplementary to the main manual which should be referred to for full safety and operational information.

Please note, more information on any of these topics is listed within the full manual found under the product page:

chordelectronics.co.uk/product/ttoby

Warranty

1.1

The TToby comes with a comprehensive 3-year warranty. To activate this warranty, please register your device via the Chord Electronics website:


chordelectronics.co.uk/register-product



Placement

2.0


Although TToby is compact, it features a highly advanced Class A/B sliding bias design which generates heat. Please ensure there is sufficient ventilation around TToby at all times. Avoid placing TToby in enclosed spaces, on soft surfaces, near sources of heat and never cover its ventilation holes. For optimum operation and ventilation leave some space around the unit.



Connecting TToby to a preamp

3.0

First, ensure that TToby, is turned off. Ensuring your pre amplifier is turned off and the volume is set to minimum, connect the XLR or RCA audio outputs from the partnering preamp to the TToby corresponding XLR or RCA inputs, paying careful attention to the left and right channels.

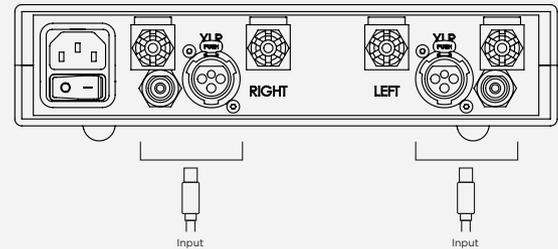


Connecting speakers to TToby

4.0

The binding posts on TToby are designed to accommodate bare wire, spade connectors and banana plugs.

Banana plugs: can be inserted into the middle of the binding posts, as shown below, to achieve a reliable connection. Align a banana plug with the binding post and push the connector confidently until it stops. You must pay attention to the polarity, making sure that a positive connection on TToby matches the positive connection on the wire and speaker. You must also pay careful attention to the left and right channels.




Quickstart Manual



Spade connectors/bare wire: unscrew TToby's binding posts, rotating counter-clockwise until there is sufficient room to attach the spade connector and then re-tighten. For bare wire, continue to unscrew until the post is exposed. Insert the wire adjacent to the post and beneath the connector and re-tighten (finger-tight) ensuring there are no stray wires.


WARNING: ALWAYS OBSERVE THE CORRECT POLARITY WHEN CONNECTING SPEAKER WIRE. NEVER MIX LEFT AND RIGHT WIRING.

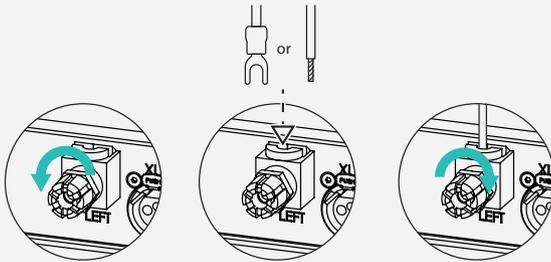

Connecting the power to TToby

5.0


Once all audio inputs and outputs are connected, connect the power cable to TToby.

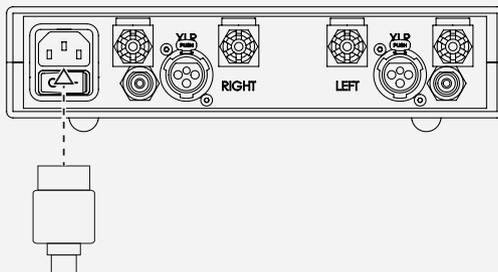

Powering up TToby

6.0

With all devices correctly connected, the system is ready for playback. Again, ensure any volume controls are set to the minimum before switching on your source and preamplifier, and then finally TToby. This sequence should always be followed to protect connected devices. Commence playback before slowly increasing the volume to a comfortable listening level.

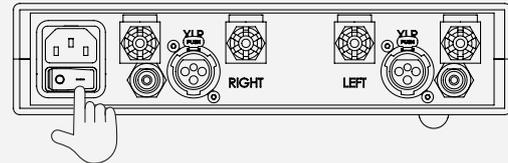

Product registration

7.0

Now that you have successfully completed the setup of your TToby you can immediately begin to experience its transformational quality on your digital music collection. However, when you spare a moment, we advise that you register your product with us. Registering helps us give you the best possible support and protects your investment:

chordelectronics.co.uk/register-product/